

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 33 TWN. 16_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 5/19/10
Party Chief: Greene
Crew: Taylor / Schermerhorn
Type of Marker: Harrison
Method of Establishment: County: 6/10/2001
IN S.P.C. E Zone, NAD 83 (1986)
Name: 16033301
N: 504 913.229 5(m)
E: 52 959.733 9(m)

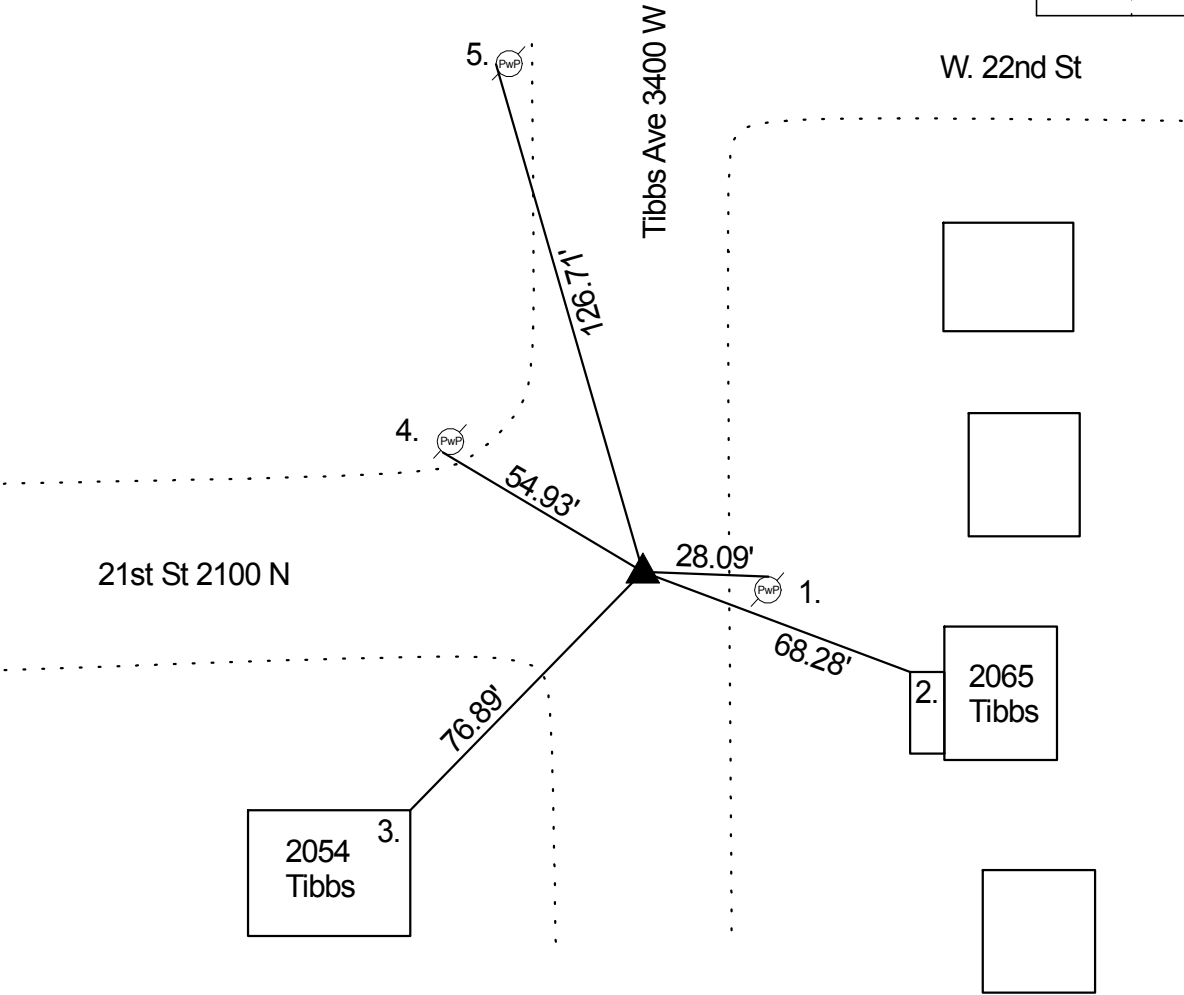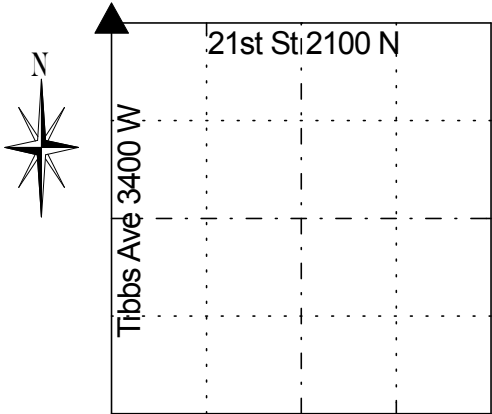

Original post set in 1820 by Wm. B. Laughlin with witnesses: 12" Buckeye N 88 E 7 links, 13" Buckeye N 84 E 14 links (Marion County Atlas Pg.7). D.B. Hasbrook 2/19/1856 notes a point with witnesses: 10" Walnut S 65 ¼ E 83 links, 20" Sugar N 89 W 76 links (Wayne Twp. Legal Survey Book Pg. 38). H.B. Fatout 6/4/1879 notes a point with witness: Blue Stone N 78 ¾ W 29 ½ links (Wayne Twp. Legal Survey Book pg. 67). H.B. Fatout 11/1/1883 notes but does not describe corner (Wayne Twp. Legal Survey Book pg. 75). Burres 4/22/1947 found stone 18" down, and set red granite stone 2" down on top of original stone. Miller 12/30/1975 called RR spike. Gries 1/14/1988 called same. Wilcoxen 8/12/1996 called same. Pruett 6/10/2001 called same. Wilcoxen 8/30/2006 called same. Greene 5/19/2010 found RR spike 5" down, over RR spike 6" down , over stone 8" down. A Harrison monument was set over broken base of the stone.

REF	DISTANCE	DESCRIPTION
1.	28.09'	Mag nail w/washer N PwP no # 12" up
2.	68.28'	NW corner concrete block foundation for porch 2065 Tibbs
3.	76.89'	NE corner of concrete block foundation 2054 Tibbs
4.	54.93'	PK nail SW PwP no # 3" up
5.	126.71'	Mag nail w/brass washer W PwP #32-459A 6" up